
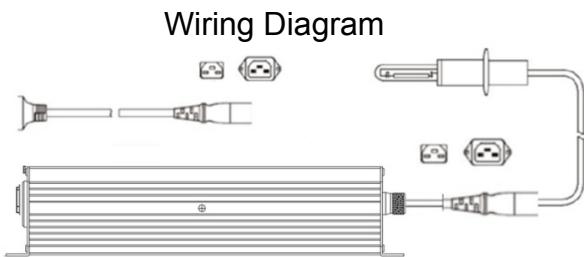


Spec of 1000W Electronic Ballast DE OK2101101

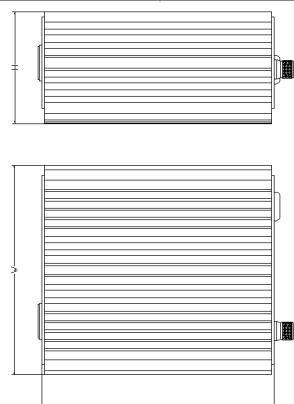

1. Dimensions

Item	Item Description	Parameter
1.1	Ballast length (L) [mm]	195± 1
1.2	Ballast width (W) [mm]	176± 1
1.3	Ballast height (H) [mm]	94± 1

2. Starting description

2.1	Minimum starting voltage [V]	160 Vac
2.2	Starting time [S]	5 Max
2.3	Pulse voltage [KV]	5.2-6kv

3. Lamp electrical parameter

3.1	Lamp type	DE 1000W
3.2	Lamp voltage [V]	180-300V
3.3	Lamp current [A]	5
3.4	Lamp wattage [W]	1000

4. Input parameter

4.1	Input voltage [V]	220-240 Vac
4.2	Input current [A]	5.22(super)
4.3	Input wattage [W]	1150(super)
4.4	Frequency [HZ]	50/60
4.5	Input power factor [$\cos\Phi$]	≥0.98
4.6	THD /	≤10

5. Output parameter

5.1	Rated frequency [kHz]	25-80K
5.2	Dimming range	600W,660W,1000W,1150W
5.3	Open Circuit Voltage [V]	≤400
5.4	Wave crest ratio [Ω]	≤1.7
5.5	Efficiency [$\cos\Phi$]	≥95%
5.6	Output	AU/EU plug QT3

6. Others

6.1	Outer case temperature [°C]	70 Max.
6.2	Ambient temperature [°C]	-20-40

Notice:

- If the lamp cannot light up, the ballast will stop working automatically after 30 minutes.
- Switch off the ballast's power supply before replacing the lamp.
- Restart the ballast after waiting for more than 1m minute.

Protection Functions:

- Short circuit protection
- Open circuit protection
- Lamp start failure protection
- End of lamp life protection